

RESIPLAST® PU SL UVM

SYSTEM DESCRIPTION

A self-levelling coloured UV-resistant polyurethane flooring system with good mechanical, chemical and scratch resistance.

System	RESIPLAST® PU SL UVM
Finish	Matt
Thickness	2 - 3 mm
Load	From light to medium duty


FIELD OF APPLICATION

- Office spaces
- Changing rooms
- Patient rooms
- Waiting rooms
- Rehabilitation areas
- Medical practices
- Residences

PROPERTIES

- High UV resistance
- Aesthetic finish
- Excellent scratch and impact resistance
- Good mechanical and chemical resistance
- Sound-absorbing
- Permanently crack-bridging
- Liquid-tight
- Seamless
- Various finishes possible using colored quartz and/or paint flakes
- High user comfort
- Solvent-free and low odour

SYSTEM BUILD-UP

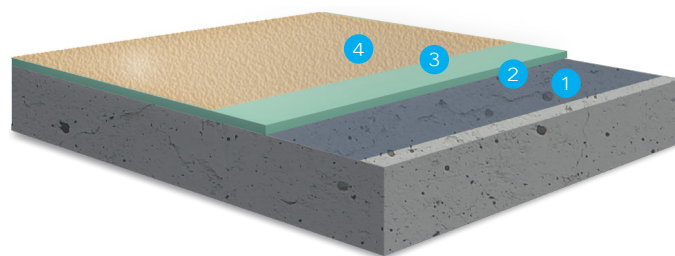

1	Primer	EPISOL® UNIVERSAL @ 300 - 400 g/m²
2	Scratch layer (optional)	EPISOL® FLOORLINE EGALISER @ 1.7 kg/m²/mm
3	Self-levelling floor	EPISOL® PU SL UV @ 1.4 kg/m²/mm
4	Topcoat	EPISOL® PU 45 OP MAT (transparent) @ 80 - 100 g/m² + RESIGRIP 150 (optional)

